

Nebulo

IGEBA®



quality

The most important quality features of our „NEBULO“ are:

- manufactured from strong durable resistant thermoplastics
- more powerful electric motor producing greater aerosol volume at higher velocity with deeper penetration
- more uniform droplet spectrum
- droplet size can be regulated by increasing or decreasing the solution flow

characteristics

Due to these characteristics our „NEBULO“ offers the following advantages:

- highly versatile and the ideal equipment for the application of insecticides, disinfectants, deodorants and even aggressive chemicals
- the range of the fog is deeper than with comparable units
- the range of application includes space and surface treatment
- easy handling and operating the unit

application

Fields of application, e.g.:

- catering trade
- food industry
- horticulture
- livestock protection
- public services and utilities
- public health
- storage warehouses
- recreation facilities
- transportation
- workplaces and waste disposals
- vaccination of poultry



Certificado
DIN EN ISO 9001:2000

9001:2000

Technical Data

Electric motor with 230/240 V,
50/60 Cycles, 700 Watts
Netweight 3,8 kg
H x W: 40 x 35 cm
Solution tank Ø 25 cm
Tank contents 4 l
Connection cable, approx. 3 m
Output infinitely adjustable from 0,3 - 15 l/h
Other Voltages available upon request

IGEBA Geratetechnik GmbH

P.O. Box 6

D-87478 Weitnau/Germany

[0]8375/9200-0

[0]8375/9200-22



info@igeba.de

www.igeba.de


Neburotor

IGEBA®



output

The **NEBUROTOR** is fitted with an infinitely adjustable through flow meter. This makes an output between 5 and maximum 250 ml/min (0.3-15l/h) possible. Even with the largest output, the droplet size is still under 30 μ .

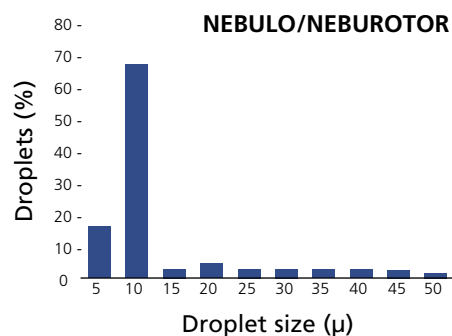

The **NEBUROTOR** is the result of consistent further development in order to facilitate operation and handling. The device is technically equipped just like the NEBULO. However, the **NEBUROTOR** is fitted on a panel, through which the device can automatically rotate between at least 90° and 360°.

Technical Data

- Electric motor with 230/240 V, 50/60 Cycles, 700 Watts
- Netweight 3,8 kg
- H x W: 40 x 35 cm
- Solution tank \varnothing 25 cm
- Tank contents 4 l
- Connection cable, approx. 3 m
- Output infinitely adjustable from 0,3 - 15 l/h
- Automatically rotation between 90° and 360°
- Other Voltages available upon request

The **NEBUROTOR** can also be fitted to the wall, by means of a wall support. If set to a rotation of 180°, the reach of the spray can be doubled. As a further accessory, we also offer a „timer“, with which you can programme the device to automatic spraying!



Certificado
DIN EN ISO 9001:2000

9001:2000

IGEBA Geratebau GmbH
P.O. Box 6
D-87478 Weitnau/Germany
[0]8375/9200-0
[0]8375/9200-22



info@igeba.de
www.igeba.de